


Laser cutting machine

ARAMIS LTC-PRO

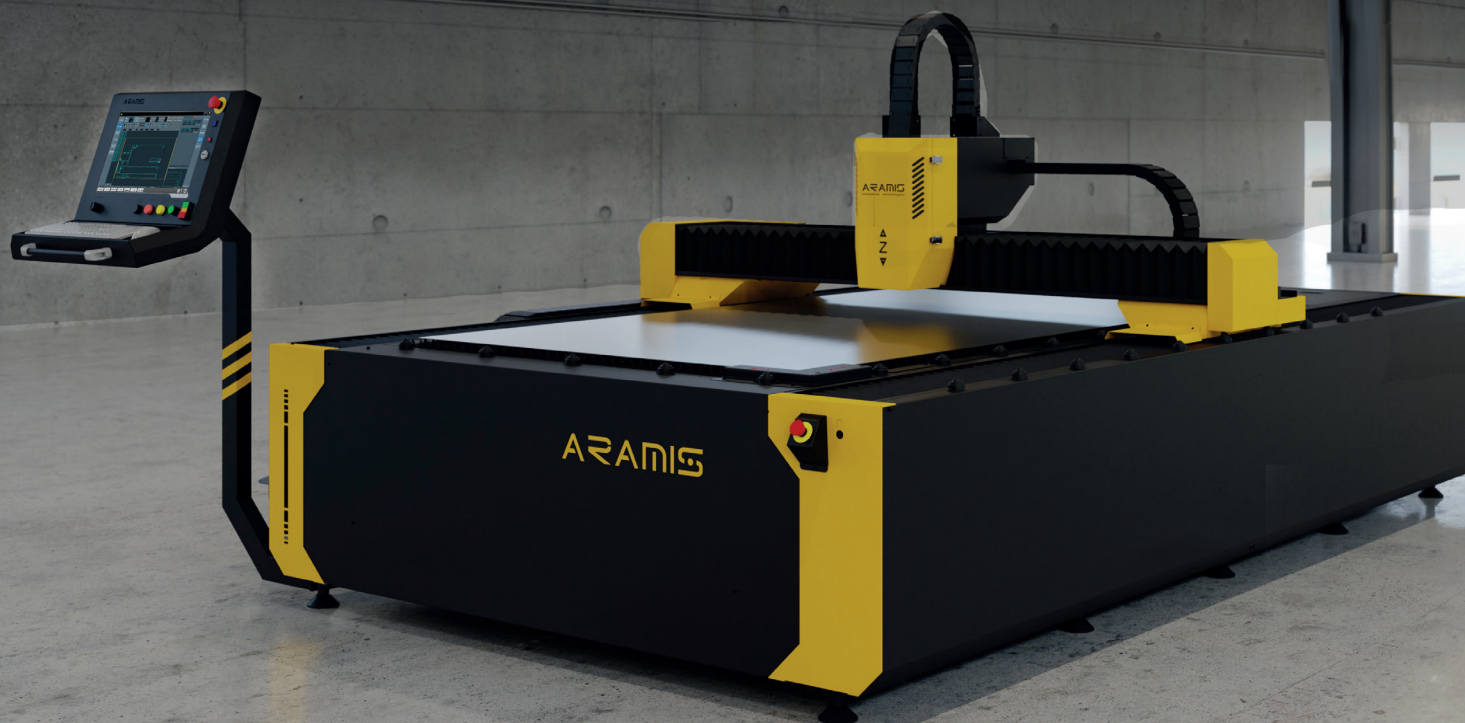

SPECIFICATIONS

LASER SOURCE

Laser type	Ytterbium fiber laser
Beam transmission	Via fiber optic cable
Source power range	1500-6000 W
Emission/cutting modes	Pulse, continuous
Laser emission wavelength	1070 nm

MOTION SYSTEM

Kinematic scheme	Portal, the sheet is motionless
Basic version of the working area	2000x6000 m
Motion system	Linear magnetic motor
Desk	Single-pallet configuration

ACCURACY PARAMETERS

Positioning accuracy	±0.01 mm
Input increment	1 micron


CUTTING PARAMETERS

Vector speed (max)	120 m/min
Applicable process gases	Oxygen, nitrogen, argon, compressed air
Number of circuits for process gases connection	3 pcs

GENERAL SPECIFICATIONS

Power supply voltage	~350 ± 10%; 50 Hz; 3-phase
Weight of the complex	9000 kg

MAX THICKNESS OF THE METAL that can be cut, mm

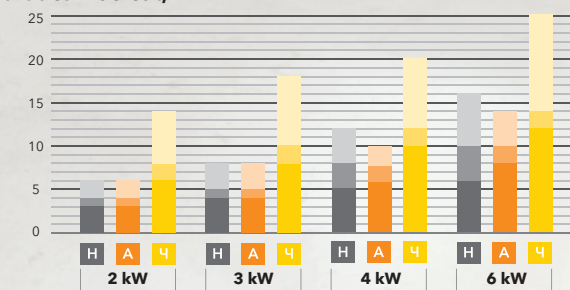

Material: **H** stainless steel, **A** aluminum, **C** black steel.
 *Color intensity corresponds to cutting speed and quality

www.aramis.ua
sales@aramis.com.ua